

Atkinson

SIGHT-GAUGES

These gauges give a clear reading of the level of contents in a tank. They have unbreakable sight tubes and can be supplied in lengths to suit any depth tank.


Push Button Gauge Specifications:

- | | |
|--------------------------|--|
| Approvals | - BS 799 Pt.2. OFTEC, OFS E103. |
| Top Cap | - Protection against insects and dust. |
| Top Clip | - To provide upper support for the sight tube. Supplied with self tapping fixing screws. |
| Sight Tube | - Clear PVC. |
| Sight Tube Shield | - Rigid PVC. (or Aluminium if requested). |
| Coupler | - A push fit onto the sight tube shield to cover the valve nipple. |
| Operation | - Push button to indicate oil level. |
| Tank Connection | - Union complete with locknut. |
| Union Size | - 1/2" BSP standard. 3/4" BSP or 1" BSP also available. |
| Gauge Length | - To suit tank depth. |
| Application | - Heating Oil, Diesel Oil, Paraffin etc. |

Dimensions:

- | | |
|---------------|---|
| Length | - 4' 0" (122.0 cm.). 5' 0" (152.5 cm.). 6' 0" (183.0 cm.). All Standard. |
| Weight | - Approx. 0.75 Kg. |

Push Button Gauge Type PBG - This unit is fitted with a self closing valve designed to comply with **BS 799** and **OFTEC OFS E103** has been accepted by major oil companies.

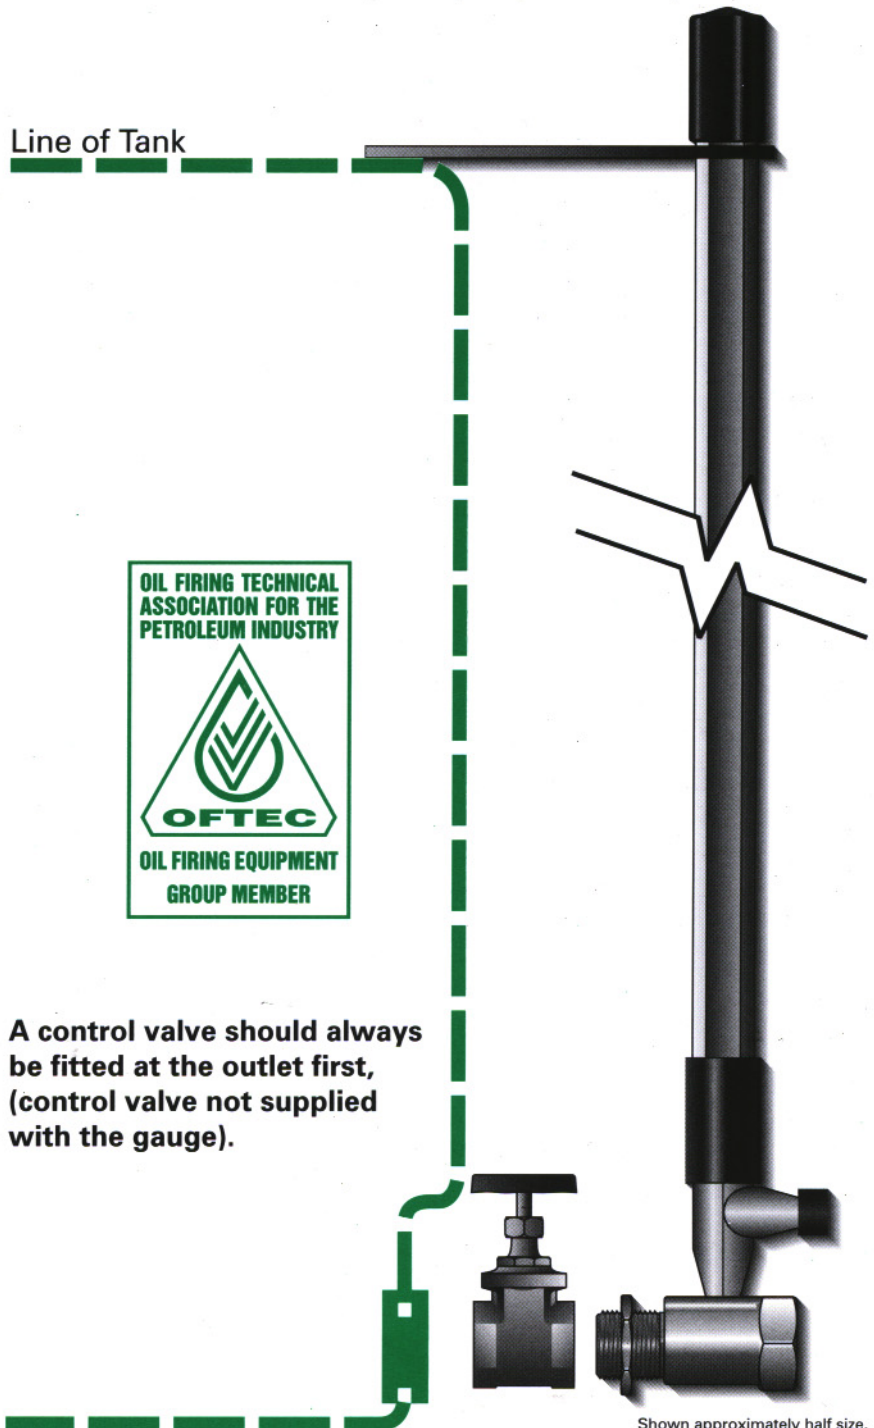

Atkinson Equipment Limited, West Wilts Trading Estate, Westbury, Wiltshire. BA13 4JF.
Telephone: (01373) 822220/823170 Facsimile: (01373) 826996