

1690 Nozzles



Husky 1690 nozzle is 30% lighter than similar nozzles.

- Nozzle designed with extra large hand opening to accommodate gloves or mittens.
- Check valve is in nozzle body, not the spout, for inexpensive and fast spout replacement.
- Includes a self-adjusting stem packing.
- Automatic shut-off with dual poppets for easy opening.
- Two position hold open latch.
- Right angle design allows nozzle to "fit" close to walls and corners.
- Cast-in protective standoffs provide durability with rough usage.
- Model 1691 includes a CUL approved spout.



New Nozzles w/ NPT Threads

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169010	without Shear Groove in Spout	4.6 (2.0)
169110+	with Shear Groove in Spout	4.6 (2.0)

Rebuilt Nozzles w/ NPT Threads


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169410	without Shear Groove in Spout	4.6 (2.0)
169510+	with Shear Groove in Spout	4.6 (2.0)

New Nozzles w/ BSPP Threads

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169038	without Shear Groove in Spout	4.6 (2.0)
169138+	with Shear Groove in Spout	4.6 (2.0)

Construction

Body	Die Cast Aluminum Body
Seals	Fluorocarbon
Packing	Double O-Ring Seal Protected by Fiber Reinforced Teflon®
Lever	One-Piece Contoured Steel
Inlet	1½" NPT and BSPP Threads

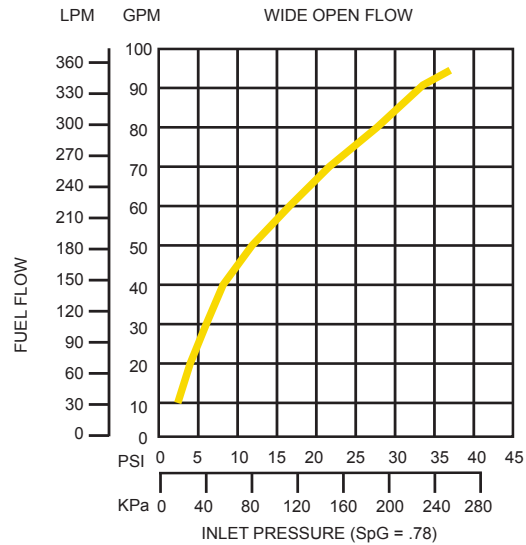

Husky 1690 nozzle is 30% lighter than similar nozzles.

Dimensions and System Options

Swivels

MODEL NO.	DESCRIPTION
5240	1¼" F x 1½" M NPT Single Plane Swivel
5266	1½" F x 1½" M NPT Single Plane Swivel
5754	1¼" F x 1½" M BSPP Single Plane Swivel
5755	1½" F x 1½" M BSPP Single Plane Swivel

Spouts

MODEL NO.	DESCRIPTION
4889	Spout Assembly without Shear Groove
5042	Spout Assembly with Shear Groove

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent - NPT
5885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
7089	Nozzle Service Kit

